



36300E Series

Compact High Power DC Electronic Load

FEATURES

- With parallel function maximum power up to 480 kW.
- Maximum up to 8 units master / slave parallel control.
- 5 digit V/A/W Meter.
- High-speed measurement and communication transmission.
- Large LCD Display \ setting values can be adjusted by rotary knob or push button.
- Voltage \ Current and Watt value can be displayed simultaneously.
- Capable for Power Factor Correction (PFC) Test.
- OCP \ OPP test function automatically.
- Power ON status can be set.
- CC, CR, CV, CP , CC+CV(CV with Current Limit) ,CP+CV(CV with Power Limit), Dynamic and Short operation mode.
- SHORT time setting.

36300E Series (1250 V / 50 kW, 60 kW)

Compact High Power DC Electronic Load



Features

- With parallel function maximum power up to 480 KW.
- Maximum up to 8 units master / slave parallel control.
- 5 digit V/A/W Meter.
- High-speed measurement and communication transmission.
- Large LCD Display \ setting values can be adjusted by rotary knob or push button.
- Voltage, Current and Watt value can be displayed simultaneously.
- Capable for Power Factor Correction (PFC) Test.
- OCP \ OPP test function automatically.
- CC, CR, CV, CP, CC+CV (CV mode with Current Limit), CP+CV (CV mode with Power Limit), Dynamic and Short operation mode.
- Power ON status can be set.
- SHORT time setting.
- Protections against I, W, °C and over-voltage alert.
- Voltage meter display the polarity positive ("+") or negative ("-") is selectable.
- Optional Interface : GPIB \ RS232 \ USB \ LAN.
- Support MPPT CV test function for solar panel
- Built-in soft-start circuit function allowing the U.U.T. power supply to be directly connected to the 36300E series load input terminal, no longer need a large relay switch with an external soft-start circuit.

Descriptions

- 36300E Series has its own control and display panel, CC / CR / CV / CP / Dynamic modes, 150 sets Store / Recall memory which provides load set-up more efficiently, also can be remote controlled via GPIB \ RS232 \ USB and LAN interface.
- SHORT time setting and SHORT_VH, SHORT_VL setting function, also can measure Short Voltage and Current.
- Dynamic can be simulated under CC, CP mode. The current Rise / Fall slew rate can be adjusted individually and there is an external signal input for a Arbitrary Waveform to simulate load current.
- Single key for OCP \ OPP test function will be more efficiency and accuracy on OCP \ OPP testing.
- Programmable Load ON / OFF voltage, GO / NG meter check, Voltage meter display "+" or "-" is selectable and 150 sets Store/Recall larger memory is much advance feature for each different application.
- 150 sets test parameter and status storage function, user can recall the storage memory real time in accordance with the auto sequence requirement.
- Maximum Voltage up to 1250 V provide an idea testing solution for Power Factor Correction test.
- Master / Slave control units maximum up to 1 MASTER, 7 SLAVE.

Applications

- Voltage / Current source
- SMPS transient response
- CV / Current limit testing and battery emulation
- Battery charger
- Battery discharge
- R&D Quality Control
- ATE system
- Production testing

SPECIFICATIONS

Model	36350E		36360E	
Power	50 KW	50 KW	60 KW	60 KW
Current	0 A to 25 A	0 A to 250 A	0 A to 30 A	0 A to 300 A
Voltage	0 V to 1250 V		0 ~ 1250V	
Protections				
Over Power Protection(OPP)			105 %	
Over Current Protection(OCP)			104 %	
Over Voltage Protection(OVP)			104 %	
Over Temp Protection(OTP)			YES	
Constant Current Mode				
Range *1	25 A	250 A	30 A	300 A
Resolution	0.42 mA	4.2 mA	0.48 mA	4.8 mA
Accuracy	± (0.1 % of setting + 0.2 % of Range)			
Constant Resistance Mode				
Range	5712 Ω to 4.76 Ω	4.76 Ω to 0.24 Ω	5004 Ω to 4.17 Ω	4.17 Ω to 0.21 Ω
Resolution *4	3.5014 μS	0.08 mΩ	3.9968 μS	0.07 mΩ
Accuracy	± 0.2 % of (Setting + Range)			
Constant Voltage Mode				
Range	1250 V		1250 V	
Resolution	20 mV		20 mV	
Accuracy	± 0.05 % of (Setting + Range)			
Constant Power Mode				
Range	5000 W	50000 W	6000 W	60000 W
Resolution	84 mW	840 mW	96 mW	960 mW
Accuracy	± 0.5 % of (Setting + Range)			
Constant Voltage + Current Limit Mode				
Range	1250 V	250 A	1250 V	300 A
Resolution	20 mV	4.2 mA	20 mV	4.8 mA
Accuracy	± 0.05 % of (Setting + Range)	± 1.0 % of (Setting + Range)	± 0.05 % of (Setting + Range)	± 1.0 % of (Setting + Range)
Constant Voltage + Power Limit Mode				
Range	1250 V	50000 W	1250 V	60000 W
Resolution	20 mV	840 mW	20 mV	960 mW
Accuracy	± 0.05 % of (Setting + Range)	± 1.0 % of (Setting + Range)	± 0.05 % of (Setting + Range)	± 1.0 % of (Setting + Range)
MPPT Mode				
Algorithm	P&O			
Load mode	CV			
P&O interval	1000 ms to 60000 ms ; resolution 1000 ms			
Dynamic Mode				
Timing				
Thigh & Tlow	0.050 ms to 9.999 ms / 99.99 ms / 999.9 ms / 9999 ms			
Resolution	0.001 ms / 0.01 ms / 0.1 ms / 1 ms			
Accuracy	1 μs / 10 μs / 100 μs / 1 ms + 50 ppm			
Slew rate	0.02 A/μs to 1.25 A/μs	0.2 A/μs to 12.5 A/μs	0.024 A/μs to 1.5 A/μs	0.24 A/μs to 15 A/μs
Resolution	0.005 A/μs	0.05 A/μs	0.006 A/μs	0.06 A/μs
Min. Rise Time	20 μs (typical)			
Accuracy	± (5 % of Setting) ± 10 μs			
Current				
Range	0 A to 26.25 A	26.25 A to 250 A	0 A to 30 A	30 A to 300 A
Resolution	0.42 mA	4.2 mA	0.48 mA	4.8 mA
Measurement				
Voltage Read Back				
Range (5 Digital)	0 V to 125 V	125 V to 1250 V	0 V to 125 V	125 V to 1250 V
Resolution	2 mV	20 mV	2 mV	20 mV
Accuracy	± 0.025 % of (Reading + Range)			
Current Read Back				
Range (5 Digital)	0 A to 26.25 A	26.25 A to 250 A	0 A to 30 A	30 A to 300 A
Resolution	0.42 mA	4.2 mA	0.48 mA	4.8 mA
Accuracy	± 0.1 % of (Reading + Range)			
Power Read Back				
Range (5 Digital)	5000 W	50000 W	6000 W	60000 W
Resolution	0.1 W	1 W	0.1 W	1 W
Accuracy *2	± 0.125 % of (Reading + Range)			
General				
Short Circuit				
Current	250 A		300 A	
Load ON Voltage	1.0 V to 250 V		1.0 V to 250 V	
Load OFF Voltage	0 V to 250 V		0 V to 250 V	
Power Consumption	5450 Wmax		6200 Wmax	
Dimension(HxWxD)	1353 mm x 853 mm x 766 mm		1508 mm x 853 mm x 766 mm	
Weight	510 Kg		630 Kg	
Emergency Stop Input (Option)	Key & TTL			
External I/O & Analog Control (Option)	CC, CV, CP, CC+CV, CP+CV			
Operating range				
Temperature *3	0 °C to 40 °C			
Humidity	20 % to 85 % rh			
Storage range				
Temperature	-20 °C to +70 °C			
Humidity	≤ 90 % rh			
Withstanding voltage test				
AC input and FG	AC 1500 V, 1 minute.			
AC input and Load terminal	AC 3000 V, 1 minute.			
Load terminal and FG	AC 1500 V, 1 minute.			

Note *1 : The range is automatically or forcing to range II only in CC mode

Note *2 : Power F.S. = Vrange F.S. x Irange F.S.




Note *3 : Operating temperature range is 0 °C to 40 °C, All specifications apply for 25 °C±5 °C, Except as noted

Note *4 : μS (microsiemens) is the unit of conductance(G), one siemens equal to 1/Ω

Input AC Power : 100 Vac to 230 Vac ± 10 %, 50/60 Hz

Cooling : Advanced Fan Cooled

All specifications are subject to change without notice.

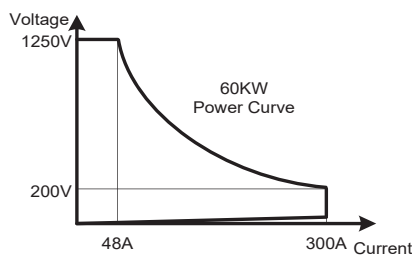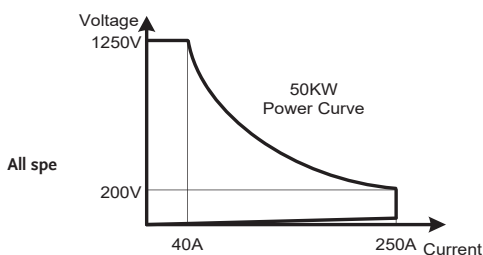

Global Headquarters

GOOD WILL INSTRUMENT CO., LTD.

No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan
T +886-2-2268-0389 F +886-2-2268-0639
E-mail: marketing@goodwill.com.tw

China Subsidiary

GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.

No. 521, Zhujiang Road, Snd, Suzhou Jiangsu 215011 China
T +86-512-6661-7177 F +86-512-6661-7277

Malaysia Subsidiary

GOOD WILL INSTRUMENT (SEA) SDN. BHD.

No. 1-3-18, Elit Avenue, Jalan Mayang Pasir 3,
11950 Bayan Baru, Penang, Malaysia
T +604-6111122 F +604-6115225

Europe Subsidiary

GOOD WILL INSTRUMENT EURO B.V.

De Run 5427A, 5504DG Veldhoven, THE NETHERLANDS
T +31(0)40-2557790 F +31(0)40-2541194

U.S.A. Subsidiary

INSTEK AMERICA CORP.

5198 Brooks Street Montclair, CA 91763, U.S.A.
T +1-909-399-3535 F +1-909-399-0819

Japan Subsidiary

TEXIO TECHNOLOGY CORPORATION.

7F Towa Fudosan Shin Yokohama Bldg., 2-18-13 Shin
Yokohama, Kohoku-ku, Yokohama, Kanagawa,
222-0033 Japan
T +81-45-620-2305 F +81-45-534-7181

Korea Subsidiary

GOOD WILL INSTRUMENT KOREA CO., LTD.

Room No.503, Gyeonginro 775 (Mullae-Dong 3Ga,
Ace Hightech-City B/D 1Dong), Yeongduengpo-Gu,
Seoul 150093, Korea
T +82-2-3439-2205 F +82-2-3439-2207

India Subsidiary

GW INSTEK INDIA LLP.

2F, No. 20/1, Salarpuria Galleria Building, Bellary Road,
Kashi Nagar, Byatarayanapura, Bangalore, Karnataka 560092 India
T +91-80-4203-3235

GW INSTEK
Simply Reliable



Website



Facebook



LinkedIn