

Rack Adapter Panel

GRA-447

GW INSTEK

Assembly Manual

GW INSTEK PART NO. 82RA-44700M01

This assembly manual contains proprietary information, which is protected by copyrights. All rights are reserved. No part of this manual may be photocopied, reproduced or translated to another language without prior written consent of Good Will company.

The information in this manual was correct at the time of printing. However, Good Will continues to improve products and reserves the rights to change specification, equipment, and maintenance procedures at any time without notice.

Good Will Instrument Co., Ltd.
No. 7-1, Jhongsing Rd., Tucheng Dist., New Taipei City 236, Taiwan.



ISO-9001 CERTIFIED MANUFACTURER

GW INSTEK

GRA-447

The GRA-447 rack mount is suited for use with the GSG-2000 Series. The GRA-447 will accommodate a 3U-sized rack.

Rack Mount Adapter Component List


Description Please check to make sure all the components of the GRA-447 rack mount kit are provided.

Item	Part NO.	Description	QTY
1	62SU-03AHD101	CA PSU 3U/4U HANDLE ,OA-12.088.01 ,AL ,RoHS	2
2	62RA-447HP101	CA GRA-447 RACK HP ,RoHS	2
3	593B-04016NS1	SCREW FMS ,M4.0*16 ,ISO ,N ,RoHS	4
4	593B-05010NS1	SCREW FMS ,+ ,M5*10 ISO, N ,RoHS	4


Assembly

Initial setup


1. Remove the parts described below from the underside of the GSG-2000 unit.
 - Foot * 4
 - M4. *10 screw * 4

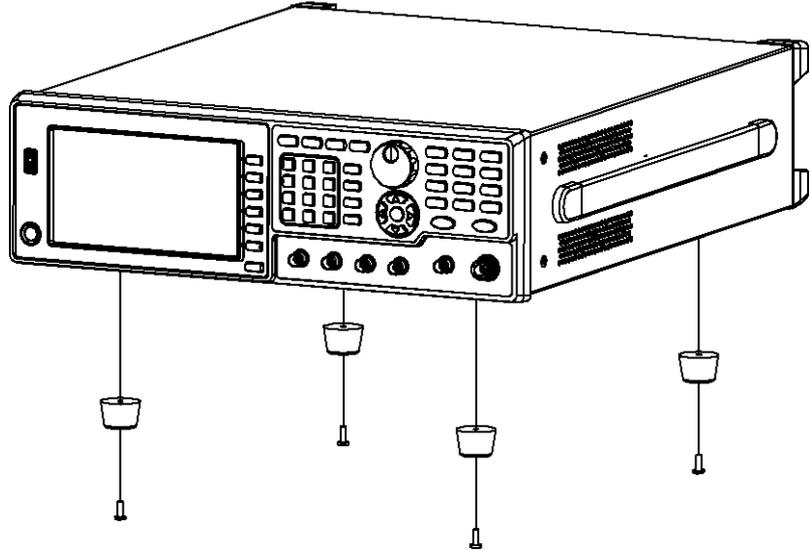

2. Screw the handles (①. 62SU-03AHD101) into the side brackets (②. 62RA-447HP101) using the (④. 593B-05010NS1) screws.
3. Screw the brackets to the side panels on the GSG-2000 unit using the (③. 593B-04016NS1) screws.

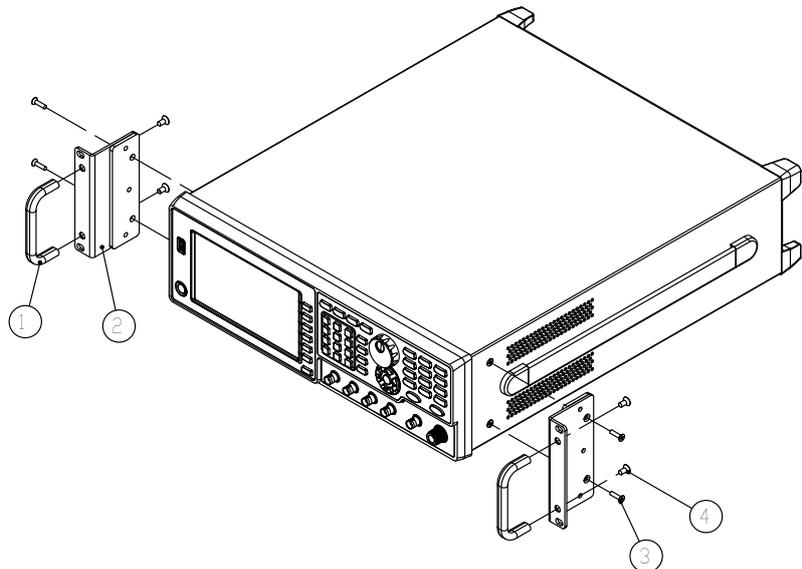

4. The GRA-447 rack mount is assembled with the GSG-2000 unit completely.

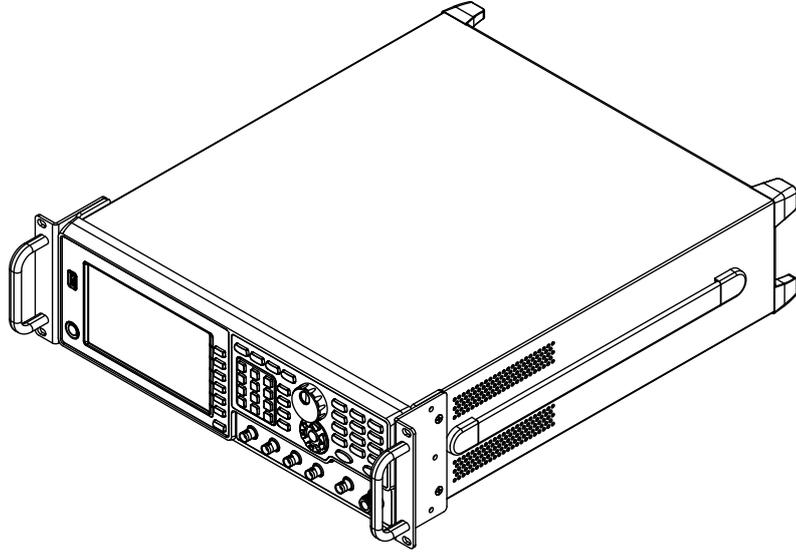

Specification

Rack Dimensions

